
# SNOWSOUND



"Hexagonal and linear modules with an informal image compose a modular system of acoustic upholstered seating, potentially never ending. Whether in its single version for small rooms or as multiple pieces for large common areas, from the small lounge to large environments, the system combines acoustic well-being and the pleasure of a comfortable seat."


Paola Navone – Otto Studio, Designer




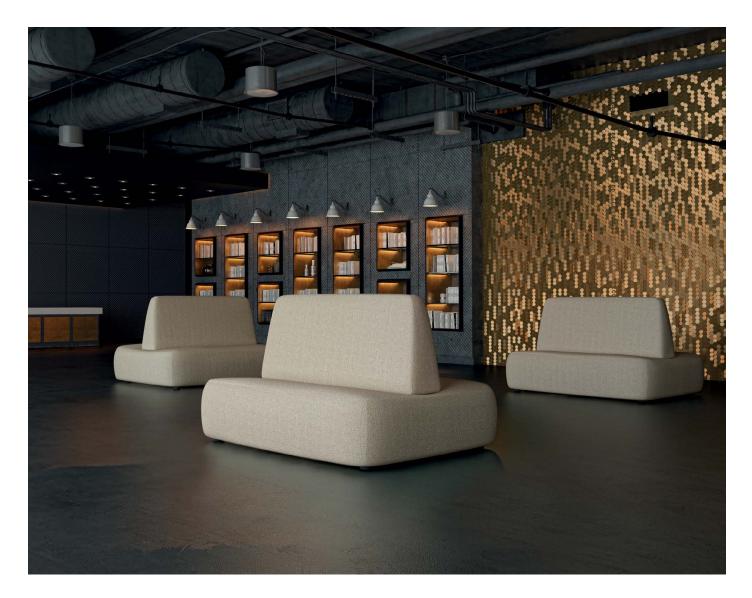

## NAPWORK

A modular system of upholstered sound-absorbing seats with a supporting structure made of wood and elastic straps sized to independently absorb low frequencies. The seats are covered with soundabsorbing polyurethane and polyester, combined with upholstery in sound-absorbing Snowsound Fiber fabric made of polyester fibers. This combination allows the seat to effectively absorb different frequencies in the best possible way. The outer upholstery cover is removable.

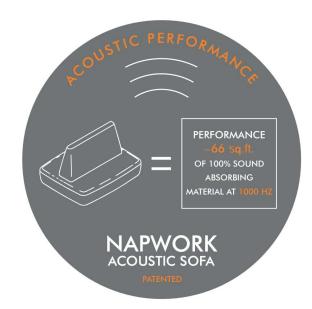


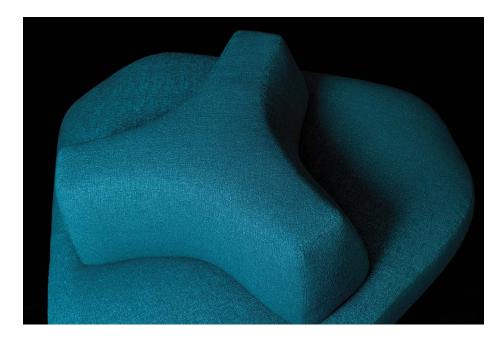







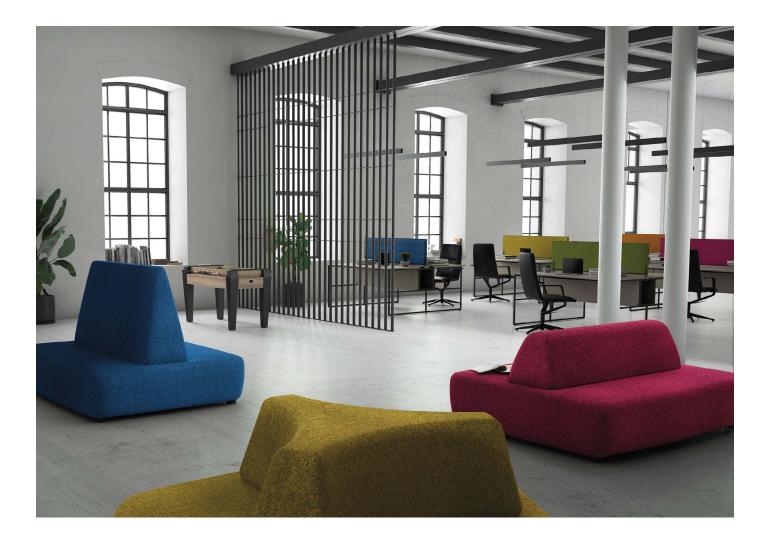



**Product Cutsheet** 

### A+E TECHNOLOGY ELECTROMAGNETIC REDUCTION




Snowsound metallized high-tech polymer fabric, infused with pure silver, serves a specific purpose: to reduce the power of electromagnetic fields while still allowing the use of smartphones and Wi-Fi networks. Unlike some materials that completely block signals, this fabric offers a balanced approach, ensuring functionality while minimizing electromagnetic exposure. By integrating this radio frequency-reducing fabric into sofas and other sound-absorbing elements, it combines the benefits of sound absorption with the reduction of electromagnetic fields. This patented technology represents a significant advancement in promoting the well-being of individuals by addressing concerns related to electromagnetic exposure.

Standard	Frequency MHz (Start–Stop)	Residual Signal Power
GSM / 850	825-895	0.85%
GSM / 900	870-960	3.34%
UMTS	1920-2170	0.56%
LTE	2510-2690	0.30%
WIFI	2400-2500	0.60%
5G	3400-3800	0.79%
WIFI	5100-5800	0.75%





## **PRODUCT SPECS: NAPWORK**

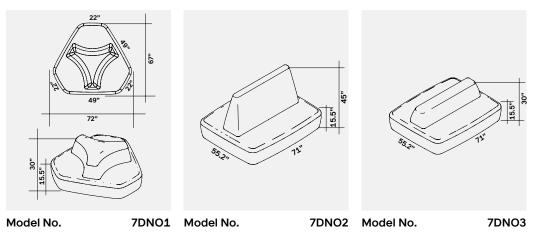

## FABRIC FINISH: FIBER 3 MELANGE

Gray Ice	300	Anthracite	302	Gray Taupe	303	Gray Beige	304	Azure	305	Gray Burgun	ndy 306
Gray Plum	307	Gray Blue	308	Gray Green	309	Gray Gold	310	Carbon Gray	311	e de la constante de Constante de la constante de la c	312
Evergreen	313	Admiral Blue	314	Fiji	315	lvory	316				

#### PHYSICAL PROPERTIES Content

100% Inherently Fire Resistant, Acoustic Sound Absorbing Polyester Fibers with Patented Snowsound Technology

Absorption Coefficient & NRC	Please refer to the online Technical Sheets for acoustical testing details					
PERFORMANCE						
Flame Resistance	Passes NFPA 701 // NFPA 260 // CAL. TB 117 // UL 723 Class A // ASTM E 84 Class A					
Environment	100% Recyclable and GREENGUARD GOLD Certified					
	LEED v4 Credits and Certification, Declare Label, LBC Red List Free					
Abrasion Resistance	50,000 rubs /cycles (tested according to Martindale Method)					
Colorfastness to Light	Grade 7 – "Outstanding" (Passes AATCC 16 / ISO 105–B02:2014)					
Colorfastness to Crocking	Wet – Grade 5. Dry – Grade 4/5. (Passes AATCC 8 / ISO 105–X12: 2016)					
Propensity to Surface Fuzzing & Pilling	Grade 5 – "no change" (Passes ISO 12945–2:2002)					

## **FABRIC FINISH: FIBER 8 BOUCLÈ**

Dove Coffee 80		Gray Ice	801	Gray Beige	802	Graphite	803	Clover	804	Oxford	805
Syreni Blue 80	06	Obsedian	807	Garnet	808	Sandstone	809	Frost	810	Rhino	811
Sahara 8:	12	Yosemite	813	Arctic	814	Mint	815				

Content	100% Inherently Fire Resistant, Acoustic Sound Absorbing Polyester Fibers with Patented Snowsound Technology						
ACOUSTIC PERFORMANCE & NOISE RE	DUCTION RATING						
Absorption Coefficient & NRC	Please refer to the online Technical Sheets for acoustical testing details						
PERFORMANCE							
Flame Resistance	Passes NFPA 701 // NFPA 260 // CAL. TB 117 // UL 723 Class A // ASTM E 84 Class A						
Environment	100% Recyclable and GREENGUARD GOLD Certified						
	LEED v4 Credits and Certification, Declare Label, LBC Red List Free						
Abrasion Resistance	25,000 rubs /cycles (tested according to Martindale Method)						
Colorfastness to Light	Grade 6/7 – "Excellent" (Passes AATCC 16 / ISO 105-B02:2014)						
Colorfastness to Crocking	Wet & Dry – Grade 5 (Passes AATCC 8 / ISO 105-X12: 2016)						
Propensity to Surface Fuzzing & Pilling	Grade 5 – "no change" (Passes ISO 12945–2:2002)						

# SNOWSOUND

### **SNOWSOUND USA HQ**

Snowsound USA 10018 Santa Fe Springs Road Santa Fe Springs, CA 90670 Tel. 562.903.9550 info@snowsoundusa.com www.snowsoundusa.com





Scan for more products



LOS ANGELES SHOWROOM Pacific Design Center Green Building, Suite G-152 8687 Melrose Ave West Hollywood, CA 90069

Hear the difference



CHICAGO SHOWROOM 222 Merchandise Mart Plaza Floor 11, Suite 1197 Chicago, IL 60654 USA

#### NEW YORK SHOWROOM New York Design Center (NYDC)

200 Lexington Ave Floor 11, Suite 1106 New York, NY 10016 USA



©2024 Snowsound USA. All rights reserved. Follow us: @snowsoundusa