

SNOWSOUND




**ACOUSTIC POUFS
& COFFEE TABLES**

“A comfortable sound-absorbing object covered with Snowsound-Fiber 3 Melange fabric and, internally, consisting of technopolymer soundabsorbing padding and wood.”


Paola Navone – Otto Studio,
Designer



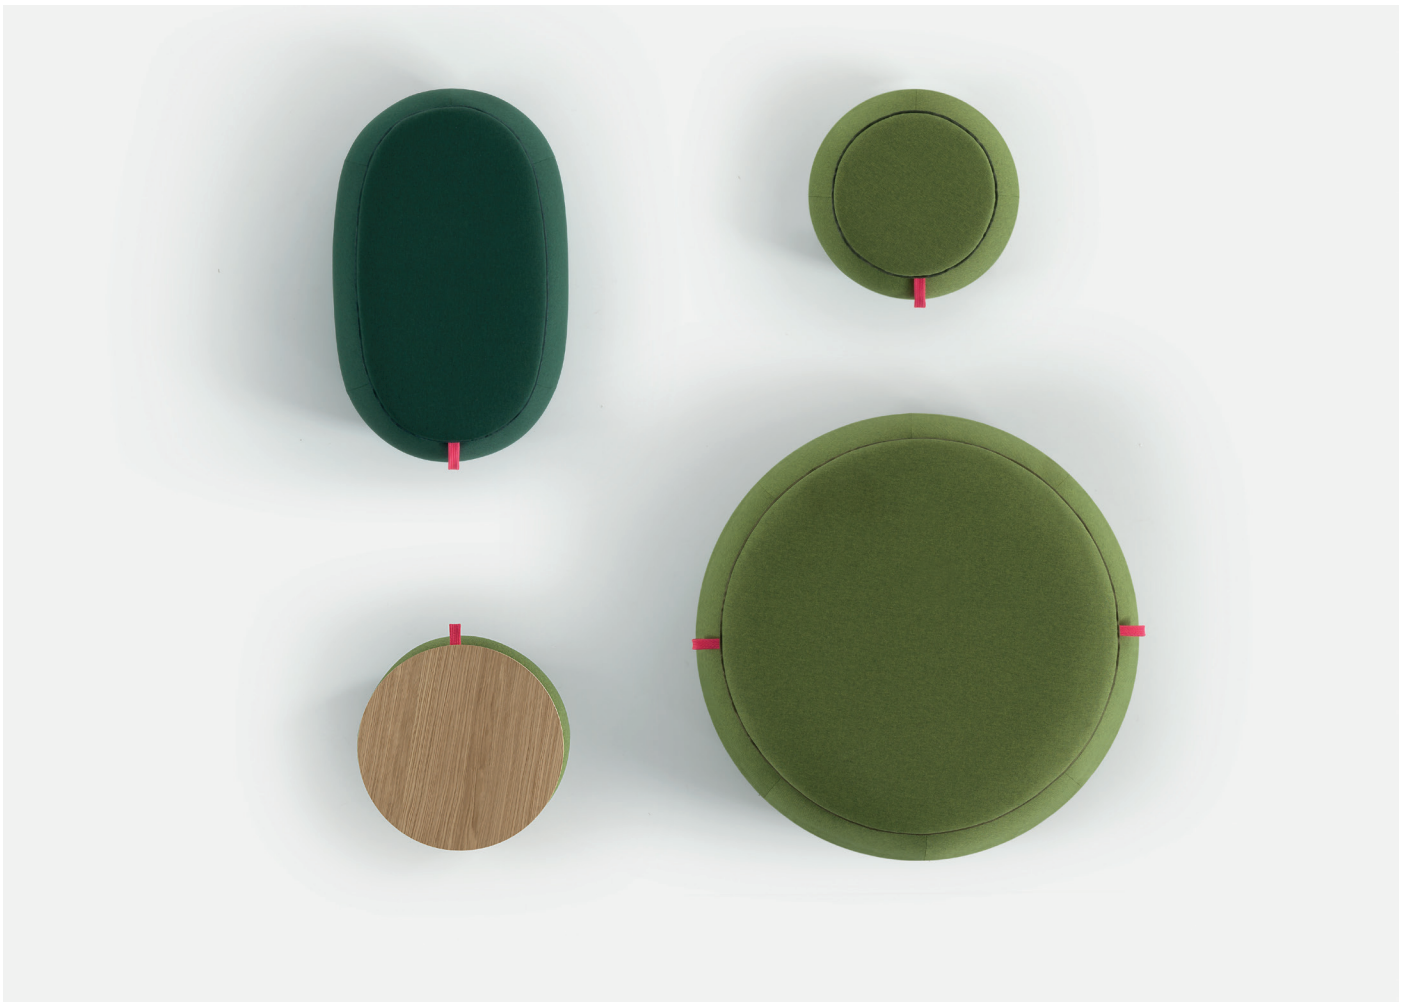

ACOUSTIC POUFS & COFFEE TABLES

Coffee tables are crafted with a load-bearing structure made of wood, covered with sound-absorbing polyurethane and polyester. This, combined with the Snowsound Fiber sound-absorbing fabric upholstery, allows the elements to effectively absorb different frequencies. Each element is equipped with 4 technopolymer feet. The solid table tops are made of MDF with wrapped oak-veneered wood. The table tops are fixed to the structure using steel plates.

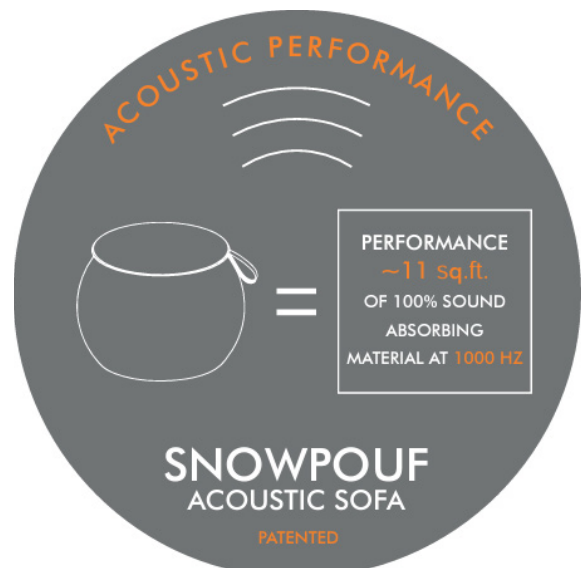






PRODUCT SPECS: SNOWPOUF




Model No. 7SN1

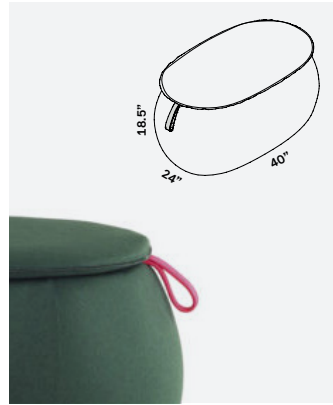

Model No. 7SN2




Model No. 7SN3

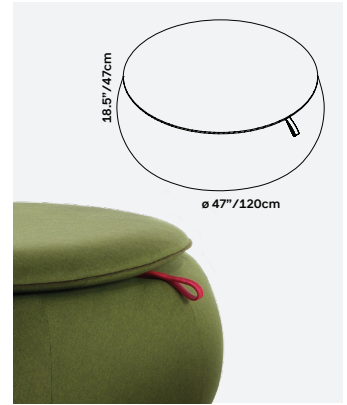

Model No. 7SN4


FABRIC FINISH: FIBER 3 MELANGE




Gray Ice 300




Anthracite 302



Azure 305




Gray Blue 308



Gray Green 309



Evergreen 313



Fiji 315

PHYSICAL PROPERTIES

Content	100% Inherently Fire Resistant, Acoustic Sound Absorbing Polyester Fibers with Patented Snowsound Technology
---------	--


ACOUSTIC PERFORMANCE & NOISE REDUCTION RATING

Absorption Coefficient & NRC	Please refer to the online Technical Sheets for acoustical testing details
------------------------------	--


PERFORMANCE

Flame Resistance	Passes NFPA 701 // NFPA 260 // CAL. TB 117 // UL 723 Class A // ASTM E 84 Class A
Environment	100% Recyclable and GREENGUARD GOLD Certified LEED v4 Credits and Certification, Declare Label, LBC Red List Free
Abrasion Resistance	50,000 rubs /cycles (tested according to Martindale Method)
Colorfastness to Light	Grade 7 – “Outstanding” (Passes AATCC 16 / ISO 105-B02:2014)
Colorfastness to Crocking	Wet – Grade 5. Dry – Grade 4/5. (Passes AATCC 8 / ISO 105-X12: 2016)
Propensity to Surface Fuzzing & Pilling	Grade 5 – “no change” (Passes ISO 12945-2:2002)

PRODUCT SPECS: SNOWPOUF

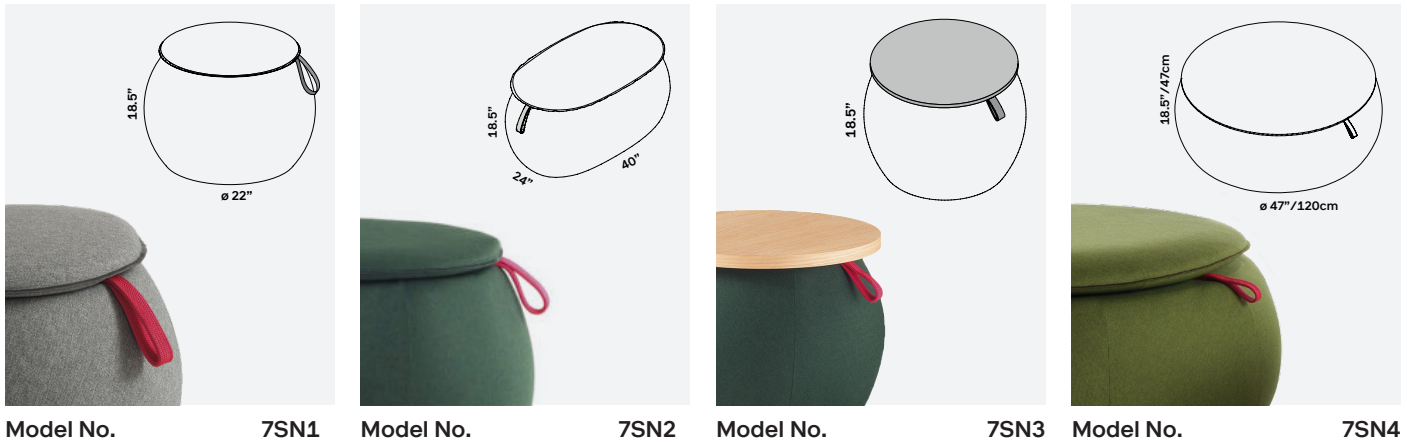

FABRIC FINISH: FIBER 12 ECONYL

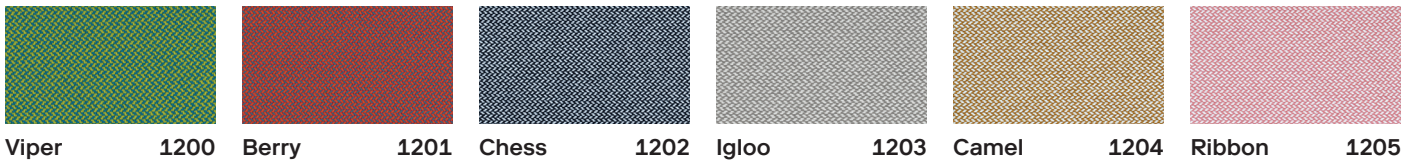

PHYSICAL PROPERTIES

Content	100% Inherently Fire Resistant, Acoustic Sound Absorbing Regenerated Nylon with Patented Snowsound Technology
---------	---

ACOUSTIC PERFORMANCE & NOISE REDUCTION RATING

Absorption Coefficient & NRC	Please refer to the online Technical Sheets for acoustical testing details
------------------------------	--


PERFORMANCE

Flame Resistance	Passes NFPA 701 // NFPA 260 // CAL. TB 117 // UL 723 Class A // ASTM E 84 Class A
Environment	100% Infinitely Recyclable and GREENGUARD GOLD Certified LEED v4 Credits and Certification, Declare Label, LBC Red List Free
Abrasion Resistance	750,000 rubs /cycles (tested according to Martindale Method)
Colorfastness to Light	Grade 6/7 – “Excellent” (Passes AATCC 16 / ISO 105-B02:2014)
Colorfastness to Crocking	Wet & Dry – Grade 4/5 (Passes AATCC 8 / ISO 105-X12: 2016)
Propensity to Surface Fuzzing & Pilling	Grade 5 – “no change” (Passes ISO 12945-2:2002)

PRODUCT SPECS: SNOWPOUF




Model No. 7SN1

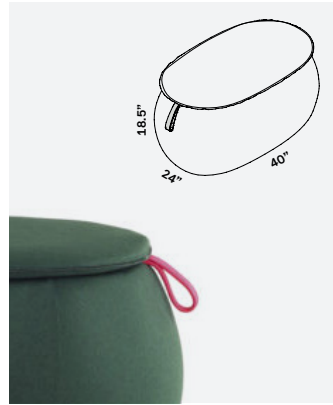

Model No. 7SN2




Model No. 7SN3

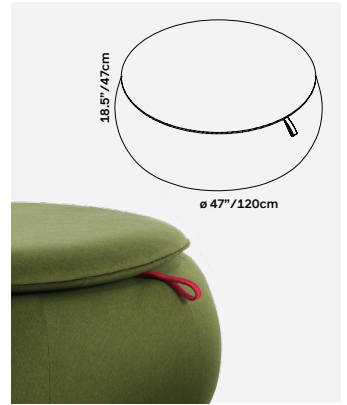


Model No. 7SN4


FABRIC FINISH: FIBER 14 BIOSPHERE




Stone 1401



Clouds 1402



Volcano 1404



Tundra 1405



Forest 1406

PHYSICAL PROPERTIES

Content	100% Inherently Fire Resistant, Acoustic Sound Absorbing Polyester Fibers with Patented Snowsound Technology
---------	--

ACOUSTIC PERFORMANCE & NOISE REDUCTION RATING

Absorption Coefficient & NRC	Please refer to the online Technical Sheets for acoustical testing details
------------------------------	--

PERFORMANCE

Flame Resistance	Passes NFPA 701 // NFPA 260 // CAL. TB 117 // UL 723 Class A // ASTM E 84 Class A
Environment	100% Recyclable and GREENGUARD GOLD Certified LEED v4 Credits and Certification, Declare Label, LBC Red List Free
Abrasion Resistance	50,000 rubs /cycles (tested according to Martindale Method)
Colorfastness to Light	Grade 7 – “Outstanding” (Passes AATCC 16 / ISO 105-B02:2014)
Colorfastness to Crocking	Wet – Grade 5. Dry – Grade 4/5. (Passes AATCC 8 / ISO 105-X12: 2016)
Propensity to Surface Fuzzing & Pilling	Grade 5 – “no change” (Passes ISO 12945-2:2002)

SNOWSOUND

SNOWSOUND USA HQ
Snowsound USA
10018 Santa Fe Springs Road
Santa Fe Springs, CA 90670
Tel. 562.903.9550
info@snowsoundusa.com
www.snowsoundusa.com



Declare.

Scan for more products



Hear the difference



LOS ANGELES SHOWROOM
Pacific Design Center
Green Building, Suite G-152
8687 Melrose Ave
West Hollywood, CA 90069

CHICAGO SHOWROOM
222 Merchandise Mart Plaza
Floor 11, Suite 1197
Chicago, IL 60654 USA

NEW YORK SHOWROOM
New York Design Center (NYDC)
200 Lexington Ave
Floor 11, Suite 1106
New York, NY 10016 USA

©2024 Snowsound USA. All rights reserved.
Follow us: @snowsoundusa

