


FIBER 2 LINE



FIBER 2 LINE

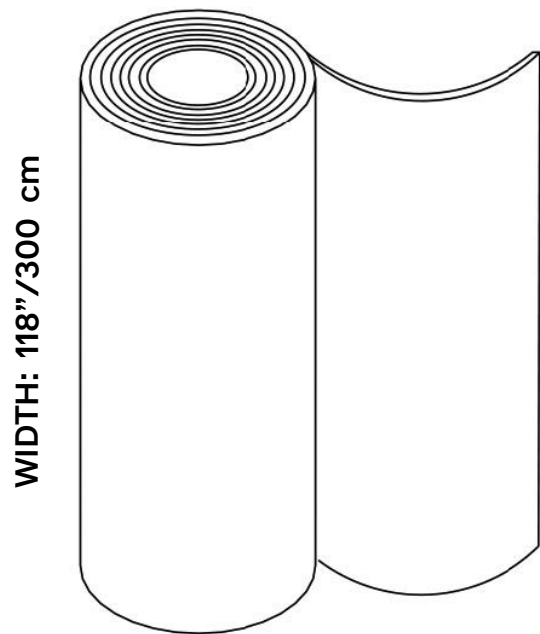

SNOWSOUND

PHYSICAL PROPERTIES

Content	100% Fire Resistant, Acoustic Sound Absorbing Polyester Fibers with Patented Snowsound Technology
Backing	Unbacked
Width	118" // 300 cm (tolerance + 0 – 3 cm)
Weight	6.5 oz per square yard / 10.7 oz per linear yard
Thickness	0.6 mm

ACOUSTIC PERFORMANCE & NOISE REDUCTION RATING

Absorption Coefficient & NRC	Sound Absorption rating per ISO 11654 with NRC up to .90 achievable depending on installation. Please refer to on-line technical sheets for details
------------------------------	---


PERFORMANCE

Flame Resistance	Passes NFPA 701 // NFPA 260 // CAL. TB 117 // UL 723 Class A // ASTM E 84 Class A
Environment	100% Recyclable and GREENGUARD GOLD Certified
Thermal & Visual Comfort	Data available according to standard ISO 14501:2006 – Solar Transmittance / Light Transmittance / UV Transmittance / Solar Reflectance / Light Reflectance / Solar Absorption / Light Absorption / Glare Control / Night Privacy / Visual Contact with the outside / Daylight Utilization / Light Transmittance (openness factor) / Solar Factor / Secondary Heat Transfer / Solar Transmittance / Shading Coefficient
Washing & Maintenance	Normal machine washing up to 86 degrees Fahrenheit. Ironing on low heat acceptable. Dry cleaning is acceptable (any solvent except Trichloroethylene). Do not tumble dry.

FIBER 2 LINE SWATCHES


SPECS

BY THE YARD | Min. roll size 6.5 yards | Max. roll size: 54.6 yards

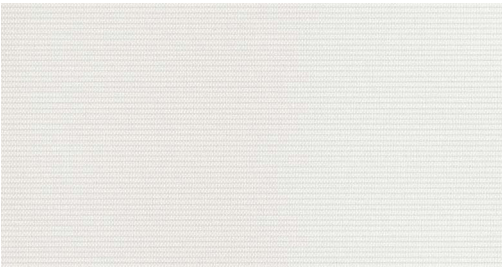


Natural White

200

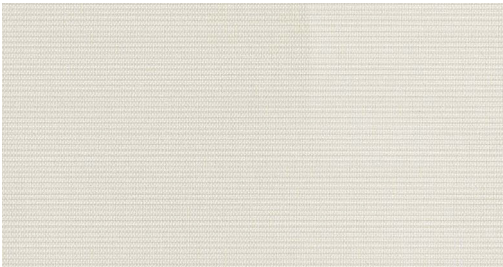


Cream

201

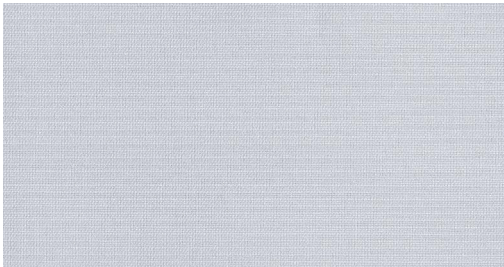

Ice Gray

202

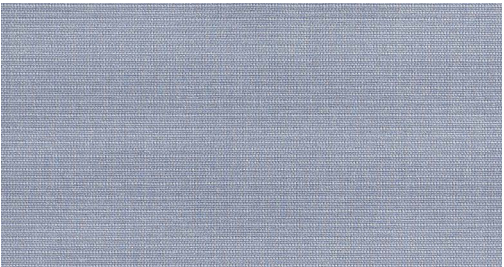

Medium Gray

203

Fiber 2 Line is sold by the yard. Maximum yardage per roll is 54.6 yards. Minimum yardage per roll is 6.5 yards. Please contact your local representative or info@snowsoundusa.com for more information and samples.