FIBER 2R LINE-R




FIBER 2R LINE-R

PHYSICAL PROPERTIES	
Content	100% Fire Resistant, Acoustic Sound Absorbing Polyester Fibers with Patented Snowsound Technology
Backing	Unbacked
Width	118” // 300 cm (tolerance + 0 – 3 cm)
Weight	6.5 oz per square yard / 10.7 oz per linear yard
Thickness	0.6 mm

ACOUSTIC PERFORMANCE & NOISE REDUCTION RATING	
Absorption Coefficient & NRC	Sound Absorption rating per ISO 11654 with NRC up to .60 achievable depending on installation. Please refer to on–line technical sheets for details.

PERFORMANCE	
Flame Resistance	Passes NFPA 701 // NFPA 260 // CAL. TB 117 // UL 723 Class A // ASTM E 84 Class A
Environment	100% Recyclable and GREENGUARD GOLD Certified
Thermal & Visual Comfort	Data available according to standard ISO 14501:2006 – Solar Transmittance / Light Transmittance / UV Transmittance / Solar Reflectance / Light Reflectance / Solar Absorption / Light Absorption / Glare Control / Night Privacy / Visual Contact with the outside / Daylight Utilization / Light Transmittance (openness factor) / Solar Factor / Secondary Heat Transfer / Solar Transmittance / Shading Coefficient
Washing & Maintenance	Avoid machine washing. Maintenance allows for spot cleaning and stain removal.

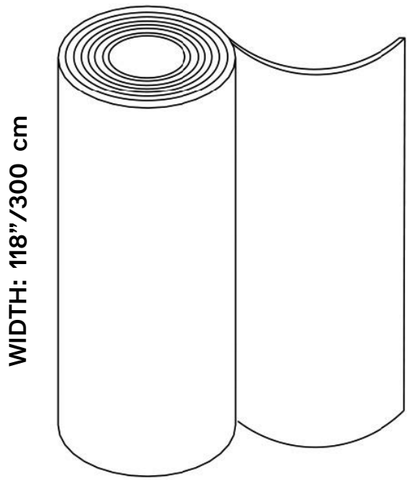


FIBER 2R LINE-R SWATCHES


SPECS

BY THE YARD | Min. roll size 6.5 yards | Max. roll size: 54.6 yards


Natural White 200

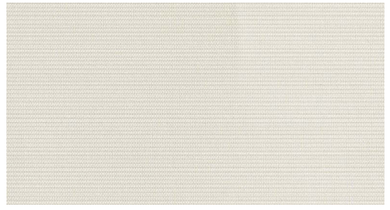

Cream 201

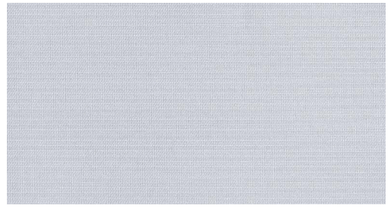

Ice Gray 202

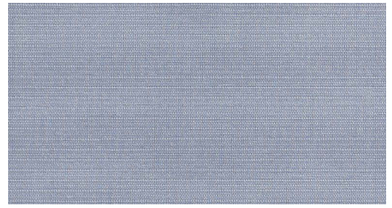

Medium Gray 203

Fiber 2R Line-R is sold by the yard. Maximum yardage per roll is 54.6 yards. Minimum yardage per roll is 6.5 yards.
Please contact your local representative or info@snowsoundusa.com for more information and samples.