
# FIBER 12 ECONYL



# FIBER 12 ECONYL

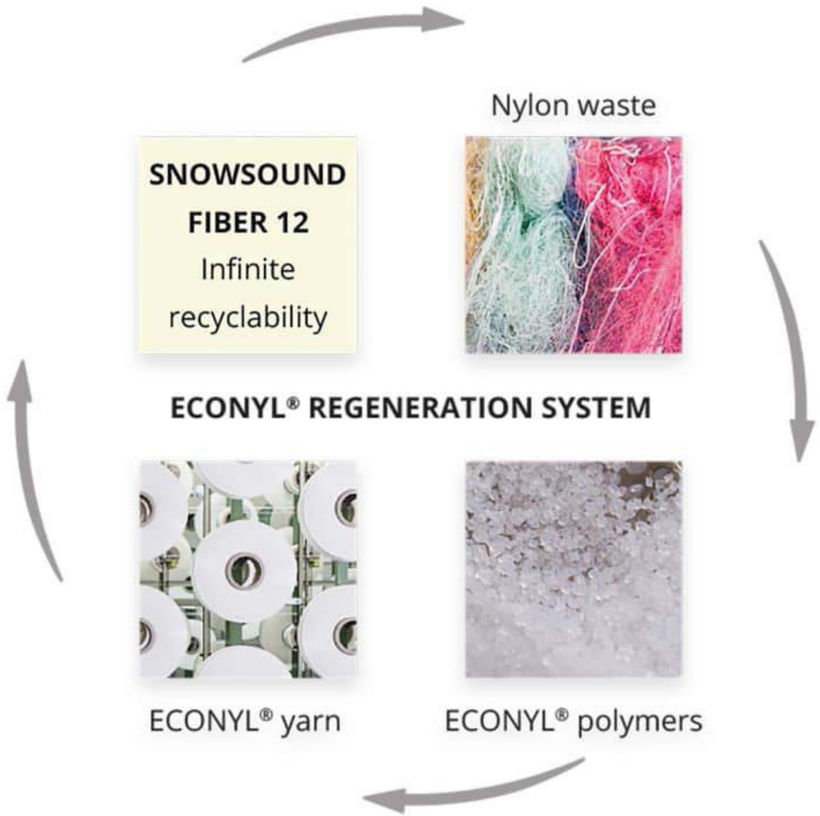


| PHYSICAL PROPERTIES | |
|---|---|
| Content | 100% Fire Resistant, Acoustic Sound Absorbing Regenerated Nylon with Patented Snowsound Technology |
| Backing | Unbacked |
| Width | 55” / 140 cm (tolerance + 0 – 3 cm) |
| Weight | 9.7 oz per square yard / 14.8 oz per linear yard |
| Thickness | 1.6 mm |


| ACOUSTIC PERFORMANCE & NOISE REDUCTION RATING | |
|---|---|
| Absorption Coefficient & NRC | Please refer to the online Technical Sheets for acoustical testing details |

| PERFORMANCE | |
|---|---|
| Flame Resistance | Passes NFPA 701 // NFPA 260 // CAL. TB 117 // UL 723 Class A // ASTM E 84 Class A |
| Environment | 100% Infinitely Recyclable and GREENGUARD GOLD Certified |
| Abrasion Resistance | 750,000 rubs /cycles (tested according to Martindale Method) |
| Colorfastness to Light | Grade 6/7 – “Excellent” (Passes AATCC 16 / ISO 105–B02:2014) |
| Colorfastness to Wet and Dry Crocking | Wet & Dry – Grade 4/5 (Passes AATCC 8 / ISO 105–X12: 2016 |
| Propensity to Surface Fuzzing and Pilling | Grade 5 – “no change” (Passes ISO 12945–2:2021) |
| Washing & Maintenance | Normal machine washing up to 86 degrees Fahrenheit. Ironing on low heat acceptable. Dry cleaning is acceptable (any solvent except Trichloroethylene). Do not tumble dry. |


# FIBER 12 ECONYL SWATCHES

**SPECS**


BY THE YARD | Min. roll size 6.5 yards | Max. roll size: 27.3 yards

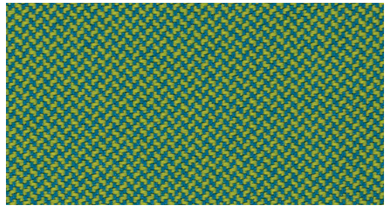


Viper 7F12–25–1200

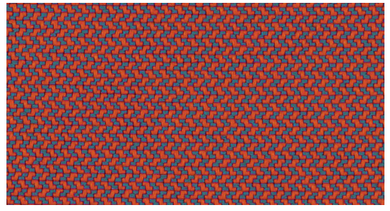


Berry 7F12–25–1201

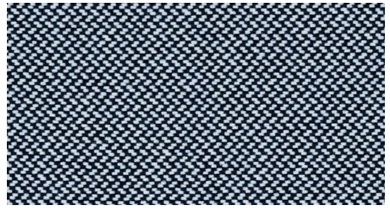


Chess 7F12–25–1202

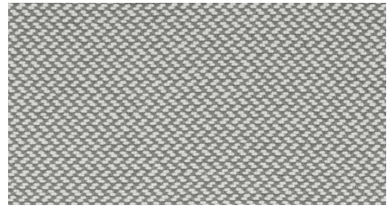


Igloo 7F12–25–1203

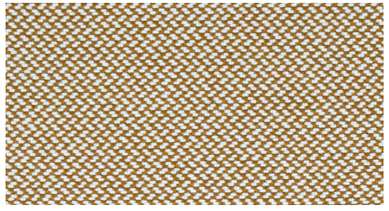

Camel 7F12–25–1204

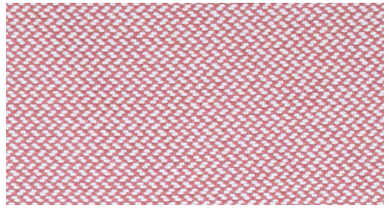

Ribbon 7F12–25–1205

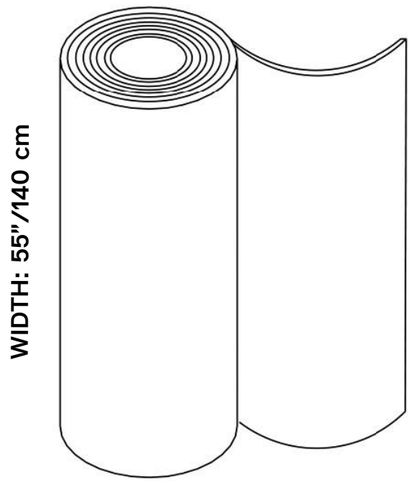




Fiber 12 Econyl is sold by the yard. Maximum yardage per roll is 27.3 yards. Minimum yardage per roll is 6.5 yards.Please contact your local representative or **info@snowsoundusa.com** for more information and samples.

# SNOWSOUND-FIBER 12


Tessuto: PLANARE
*Fabric: PLANAR*

Installazione: Distanza da parete 10cm (D=10cm)
*Installation: Distance from the wall 10cm (D=10cm)*

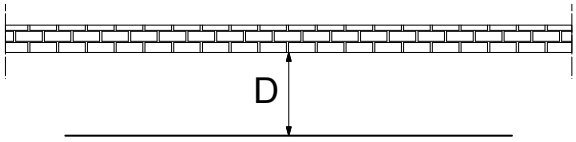

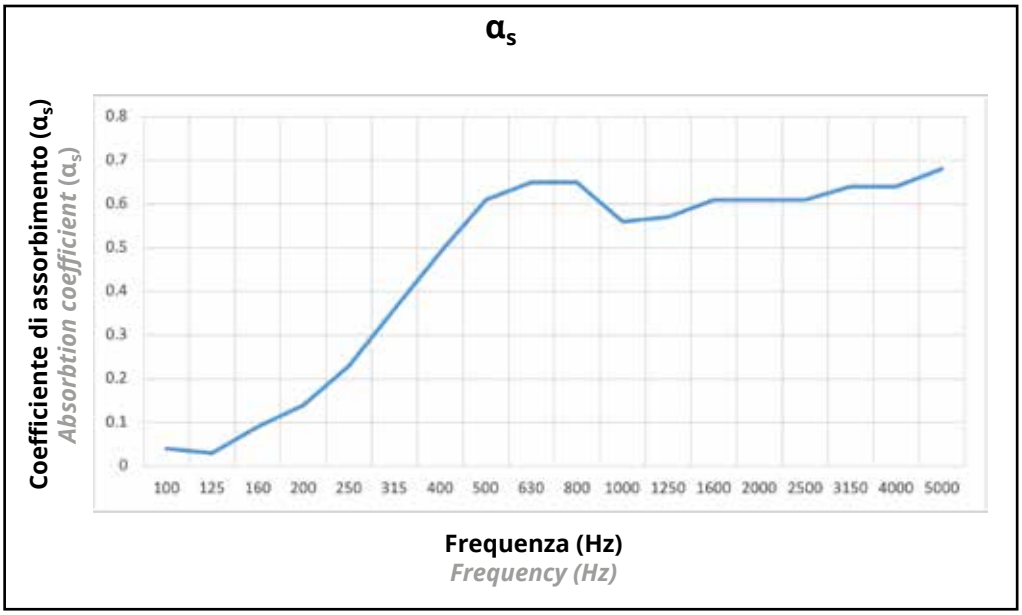
La prova è stata eseguita secondo le prescrizioni della norma UNI EN ISO 354
*Test executed according to UNI EN ISO 354*

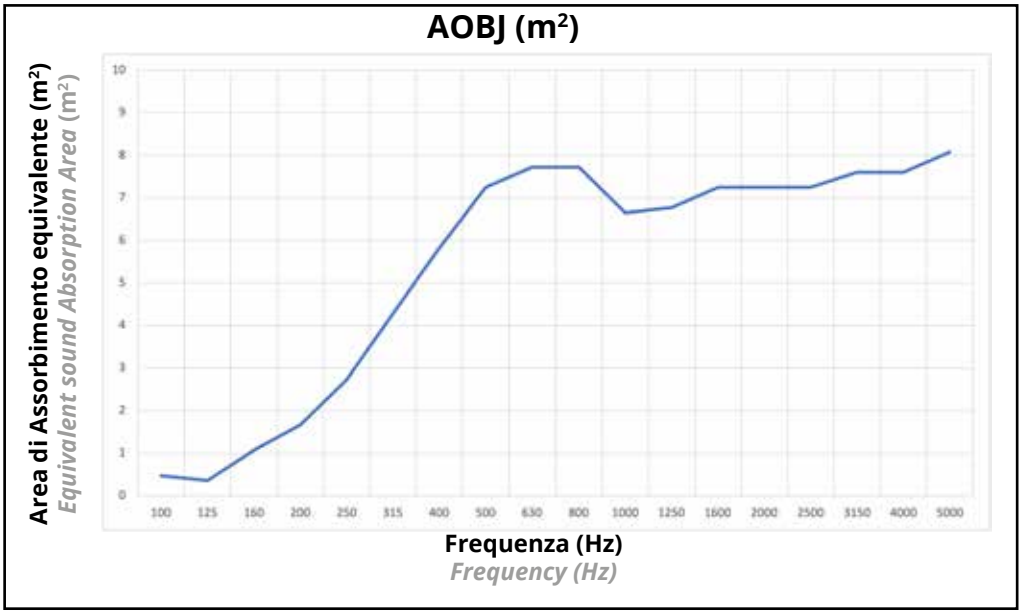


La prova è stata eseguita secondo le prescrizioni della norma UNI EN ISO 354
*Test executed according to UNI EN ISO 354*